

FutureCom™ F/FTP 450/23 PE, black

Category 6, 1000 m

CORNING

The FutureCom™ F/FTP 450/23 PE cable is designed for outdoor applications up to 450 MHz and its transmission characteristics exceed Category 6 specifications according to EN 50288-5-1, IEC 61156-5 and TIA/EIA 568.

The improved operating temperature of up to -60 °C enables direct laying in the ground in the most adverse conditions.

High system margins for the complete link according to ISO/IEC 11801 Ed.2.2 (AMD 2:2010) and EN 50173 (Series) will be achieved by using corresponding hardware together with this copper data cable.

Due to the very low delay skew between the pairs these FutureCom cables are especially suitable for Gigabit Ethernet. The cable has a streamlined construction and low weight.


Each pair is individually foil shielded, which guarantees outstanding shielding characteristics. The cable satisfies Class B interference radiation standards according to EN 55022, as well as immunity according to EN 55024, which enables the realisation of CE-compatible networks.

Features

- F/FTP 450/23 cable specified up to 450 MHz
- Outstanding electrical characteristics
- Each twisted pair is shielded with metal foil (PIMF)
- Streamlined design, lightweight
- Lightweight
- Low skew between the pairs
- Halogen-free



Part Number: CCXDAA-D0047-C001-L7

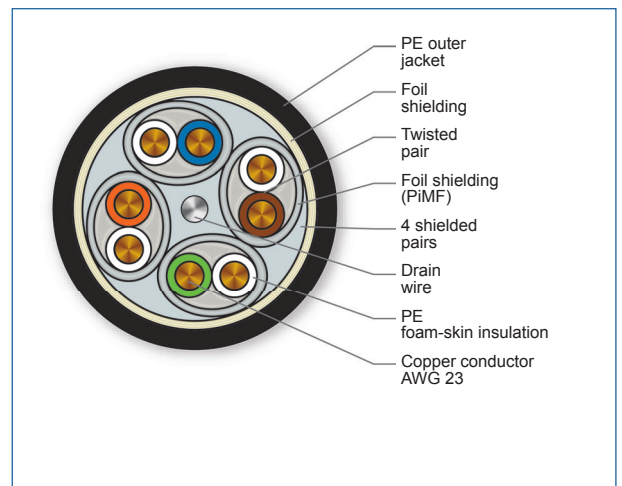

Cross Section of Order Number: CCXDAA-D0047-C001-L7

FutureCom™ F/FTP 450/23 PE, black

Category 6, 1000 m

CORNING

Specifications

General Specifications

Environment	Outdoor
Cable type	F/FTP
Category	6
Bandwidth	450 MHz
Halogen-free	Yes

Temperature Range

Installation and assembly	0 °C to 50 °C
Operation	-60 °C to 60 °C

Cable Design

No. of pairs	4
Outer jacket material	Polyethylene (PE)
Outer jacket colour	Black

Mechanical Characteristics

Conductor Insulation	Halogen-free foam-skin material
Min. Bend Radius Operation	3x Cable-Ø (over flat side)
Min. Bend Radius Installation	8x Cable-Ø (over flat side)
Copper conductor	AWG 23
Fire Load	0.91 MJ/m
Maximum Tensile Strength	101 N
Nominal Outer Diameter	7.4 mm

Electrical characteristics (at 20°C)

Conductor resistance unbalance	1 %
Insulation Resistance	> 5000 MΩ*km
Surface transfer impedance	< 100 mΩ/m at 10 MHz
Delay skew	4 ns/100 m
Coupling attenuation	> 70 dB

FutureCom™ F/FTP 450/23 PE, black

Category 6, 1000 m

CORNING

Electrical characteristics (at 20°C)

Max. loop resistance	165 Ω/km
Voltage rating	less than 75 V d.c max and less than 50 V a.c max

Electrical characteristics (at 20°C)

Frequency [MHz]*	1	10	16	20	31.25	62.5	100	250	450
Attenuation according to Standard [dB/100 m]*	2.1	6.0	7.6	8.5	10.8	15.5	19.9	33.0	-
Typical attenuation [dB/100 m]*	1.8	5.3	6.8	7.6	9.6	13.6	17.3	27.7	38.0
NEXT according to Standard [dB/100 m]*	66.0	59.3	56.2	54.8	51.9	47.4	44.3	38.3	-
Typical NEXT Values [dB/100 m]*	100	100	100	100	100	97.0	95.0	90.0	85.0
ACR-N according to Standard [dB/100 m]*	63.9	53.3	48.6	46.3	41.1	31.9	24.4	5.3	-
Typical ACR-N Values [dB/100 m]*	98.2	94.7	93.2	92.4	90.4	82.4	77.7	62.3	47.0

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Ordering Information

Part Number	CCXDAA-D0047-C001-L7
Product Description	FutureCom™ F/FTP 450/23 PE Cable, black, 1000 m
Weight	48 kg/km
Length	1,000 m

Shipping Information

Maximum delivery length	1,000 m
Packing type	Drum



Corning Optical Communications GmbH & Co. KG · Leipziger Strasse 121 · 10117 Berlin, GERMANY

00 800 2676 4641 · FAX: +49 30 5303 2335 · www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified.

© 2017 Corning Optical Communications. All rights reserved.